

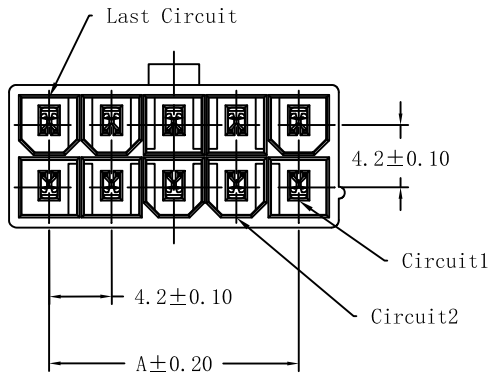



P. C. B LAYOUT

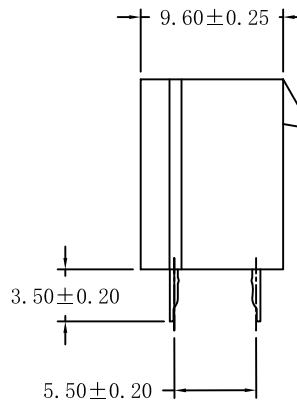


Ordering Information & Dimensions

Circuits	Dimensions (mm)	
	A	B
2x1P	—	5.40
2x2P	4.20	9.60
2x3P	8.40	13.80
2x4P	12.60	18.00
2x5P	16.80	22.20
2x6P	21.00	26.40
2x7P	25.20	30.60
2x8P	29.40	34.80
2x9P	33.60	39.00
2x10P	37.80	43.20
2x11P	42.00	47.40
2x12P	46.20	51.60

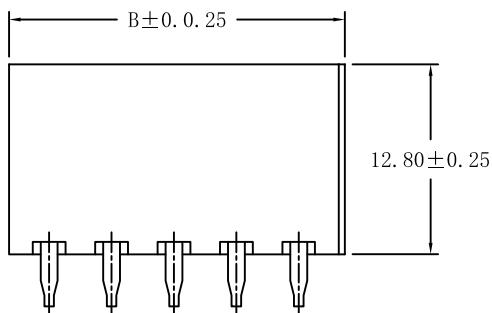

规格:

1. 额定电流/Current Rating:9.0A AC/CD
2. 额定电压/Voltage Rating:600V AC/CD
3. 接触电阻/Contact Resistance:10mΩ Max
4. 耐电压/Dielectric Withstanding Voltage 1500V AC/minute
5. 绝缘电阻/Insulation resistance: 1000MΩ Min
6. 工作温度/Operation Temp:-40℃~+105℃
7. 插针材料/Contact Plating:Brass/Tin over Nickel
3. 绝缘材料/Insulator Material:Nylon 66,UL 94V-2(Natural)

		Guangzhou cal-boz Technology, Limited. 广州市卡而博泽科技有限公司					
General Tolerance		PART NO.		C-C4201WVA-2xXP			
X.XX≤0.30 X.XX≤0.20 X.XXX≤0.10	ANGLE± 	TITLE		4.20mm PITCH 180° DUALROW WAFER			
		DRAW		Niko			
		CHECK					
SCALE	UNIT	VERSION	DATE	SHEET	SIZE		
1:1	mm	A0	04.05.2014	1/1	A4		