

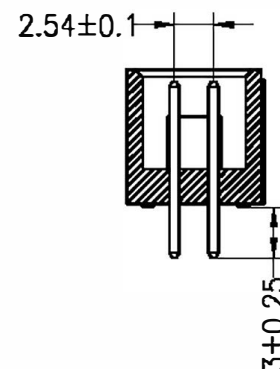
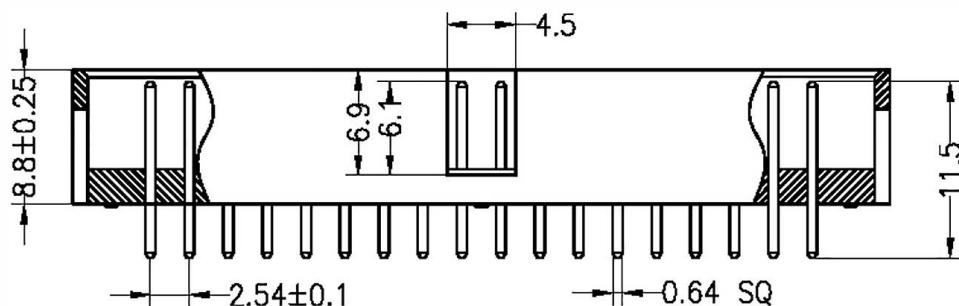
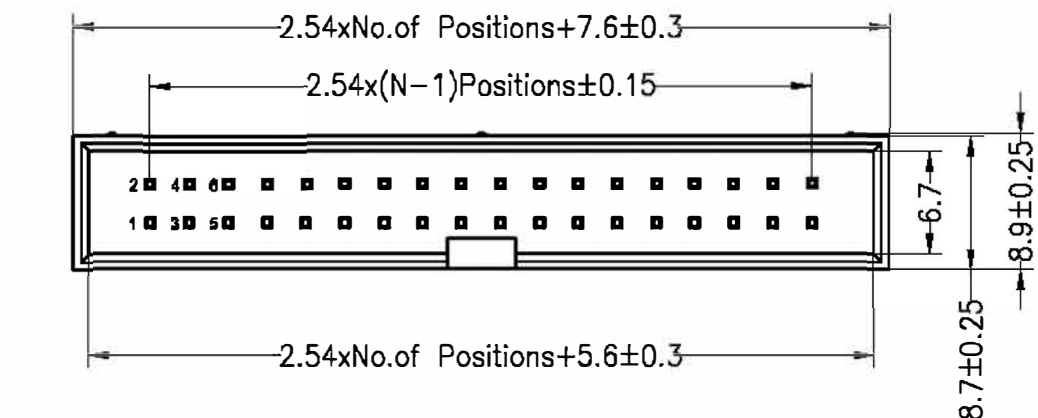
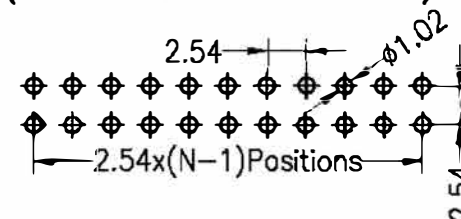
RoHS

参数:

1. 额定电流/Current Rating: 3.0Amp
2. 接触电阻/Contact Resistance: $20m\Omega$ Max
3. 耐电压/Dielectric Withstanding Voltage 1000V AC/DC
4. 绝缘电阻/Insulation resistance: $1000M\Omega$ Min
5. 工作温度/Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

材质:

1. 针材料/Contact Material: Brass
2. 触点材料/Contact Plating: Au Or Sn Over Ni
3. 绝缘材料/Insulator Material: Polyester (UL94V-0)
4. 材质/standard: PBT
5. 耐温/MAX. Processing Temp: 180°C for 30-60 seconds
 200°C for 10 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Guangzhou cal-boz Technology, Limited.
广州市卡而博泽科技有限公司

General Tolerance		PART NO.	C-2xXP-JB-VA			
X.XX ≤ 0.30 X.XX ≤ 0.20 X.XXX ≤ 0.10	ANGLE $\pm$ 	TITLE	2.54mm Pin Header 2.5mm Single 180°			
		DRAW	Niko			
		CHECK				
SCALE	UNIT	VERSION	DATE	SHEET	SIZE	
1:1	mm	A0	28.03.2012	1/1	A4	

[Http://www.cal-boz.com](http://www.cal-boz.com)