

NOTES:

1. Current Rating:3.0Amp
2. Contact Resistance:20mΩ
3. Withstanding Voltage 1000V AC/DC
4. Linsulation resistance: 1000MΩ Min
5. Operation Temp:-40℃~+105℃
6. Housing Material: LCP+30%G.F (UL94V-0)
7. Contact Material: Phosphor Bronze
8. Contact plating: Au Or Sn voer Ni

Ordering Information

C-2170T-2XX K XX D UN T 1


No. fo Pins
02~36P

Contact Plating
G0:Gold Flash
D3:10u" Gold
D4:15u" Gold
D5:30u" Gold
S0:Gole
Flash/Tin
S3:10u" Gold/Tin
S4:15" Gold/Tin
S5:30" Gold/Tin
SM:Tin
SM:matte Tin



D:LCP

Packing
T:Tube

2.54±0.15
[.100±0.006]

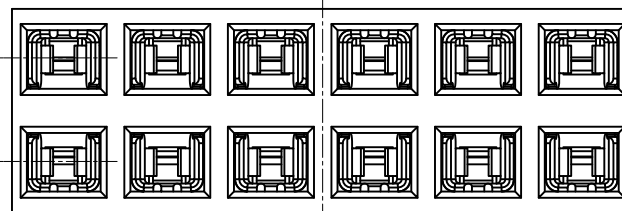


2.54XNo.of Postions/2±0.30
[.100XNo.of Postions/2±.012]

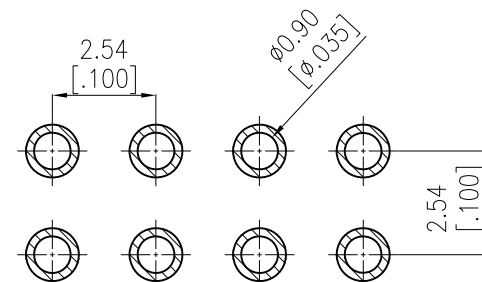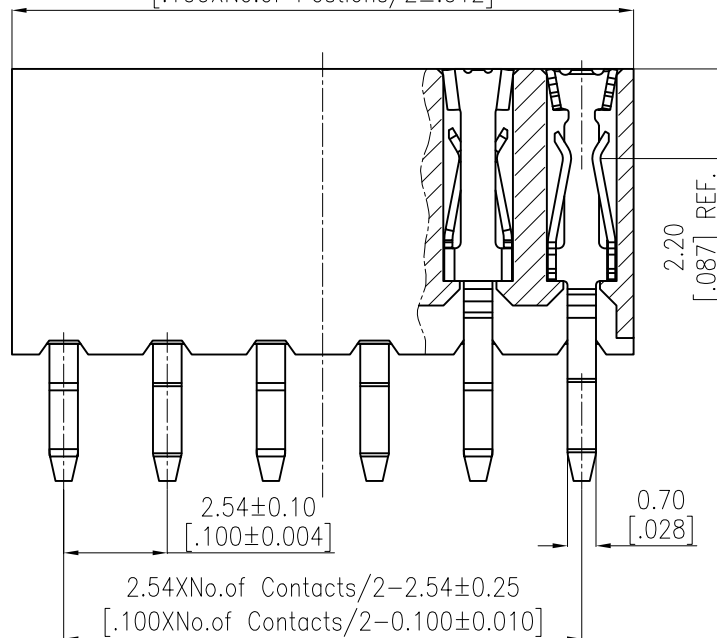

Recommended P.C.B Layout(Top Side)

(PCB BOARD TOLERANCE±0.05)

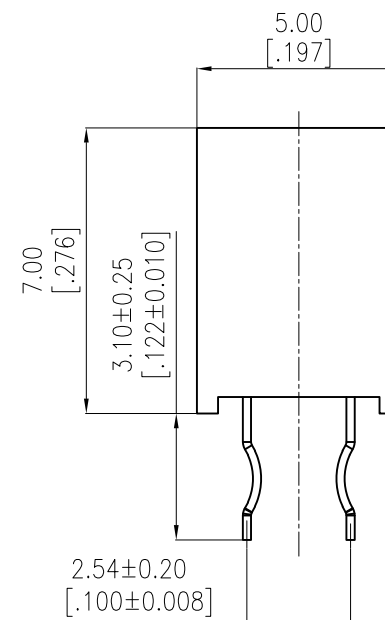

Guangzhou cal-boz electrical science&technology Co., Limited.

General Tolerance

X.XX≤0.30
X.XX≤0.20
X.XXX≤0.10

ANGLE±



PART NO. C-2170T-213KGODUNT1

TITLE 2.54 Pitch Vertical Both Rows
DIP Connentor 7.0mm Height

DRAW Niko

CHECK

SCALE

1:1

UNIT

mm

VERSION

A0

DATE

09.05.2014

SHEET

1/1

SIZE

A4

Http\\www.cal-boz.com