



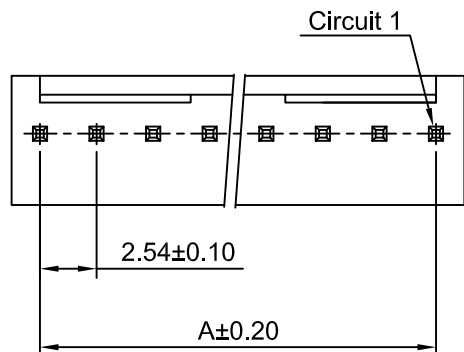
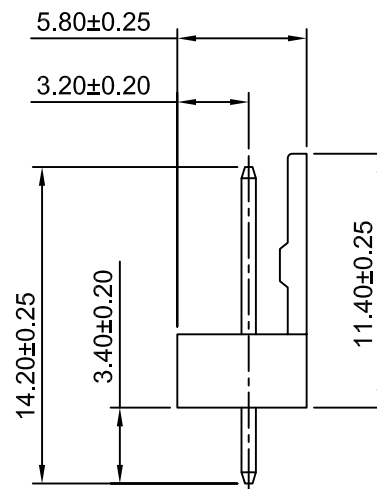
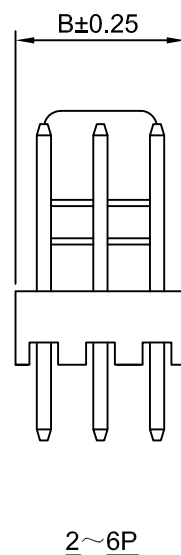


RoHS

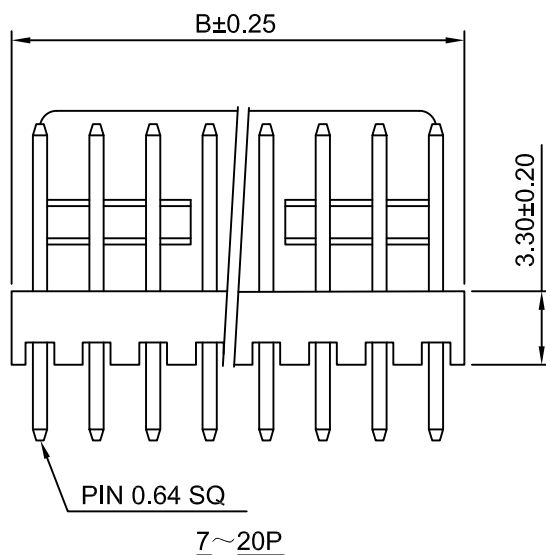

P.C.B LAYOUT



参数:

1. 额定电流/Current Rating:4.0Amp AC/DC
2. 额定电压/Voltage Rating:250V DC
3. 工作温度/Operation Temperature:-40℃~+105℃
4. 接触电阻/Contact Resistance:10mΩ Max
5. 绝缘电阻/Insulation resistance: 100MΩ Min
6. 耐电压/Dielectric Withstanding Voltage 1000V AC/minute
7. 触点材料/Contact Plating:Brass/Tin Over Nickel
8. 绝缘材料/Insulator Material:Nylon 66, UL94V-0 (Brown)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.08	12P	27.94	30.48
3P	5.08	7.62	13P	30.48	33.02
4P	7.62	10.16	14P	33.02	35.56
5P	10.16	12.70	15P	35.56	38.10
6P	12.70	15.24	16P	38.10	40.64
7P	15.24	17.78	17P	40.64	43.18
8P	17.78	20.32	18P	43.18	45.72
9P	20.32	22.86	19P	45.72	48.26
10P	22.86	25.40	20P	48.26	50.80
11P	25.40	27.94			



Guangzhou cal-boz Technology, Limited.
广州市卡而博泽科技有限公司

General Tolerance

PART NO. C-A2543WV-XP

X.XX≤0.30
X.XX≤0.20
X.XXX≤0.10

ANGLE±



TITLE

2.54mm PITCH 180° WAFER

DRAW

Niko

CHECK

SCALE

UNIT

VERSION

DATE

SHEET

SIZE

1:1

mm

A0

11.04.2012

1/1

A4

[Http\\www.cal-boz.com](http://www.cal-boz.com)