


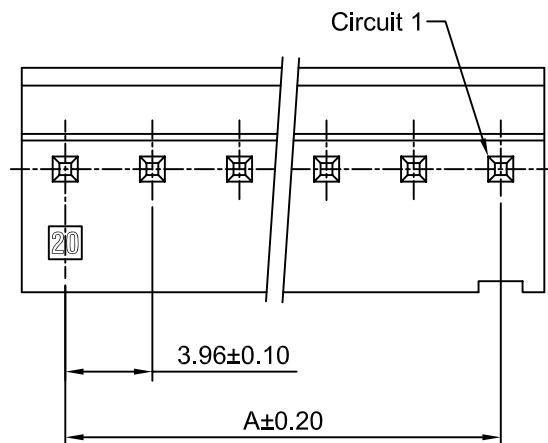

Ordering Information:

A3961WV-XP - *** - ** - **
1 2 3 4

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-2/Natural

V0:Nylon 66,UL94V-0/White

GWT:Nylon 66,UL94V-0,GWT 750°C

3.Color:


(blank):Natural/White

RD:Red


4.Finish:

(blank):Tin over Nickel

G:Gold over Nickel



P.C.B LAYOUT



SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min



Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	7.92	12P	43.56	47.52
3P	7.92	11.88	13P	47.52	51.48
4P	11.88	15.84	14P	51.48	55.44
5P	15.84	19.80	15P	55.44	59.40
6P	19.80	23.76	16P	59.40	63.36
7P	23.76	27.72	17P	63.36	67.32
8P	27.72	31.68	18P	67.32	71.28
9P	31.68	35.64	19P	71.28	75.24
10P	35.64	39.60	20P	75.24	79.20
11P	39.60	43.56			

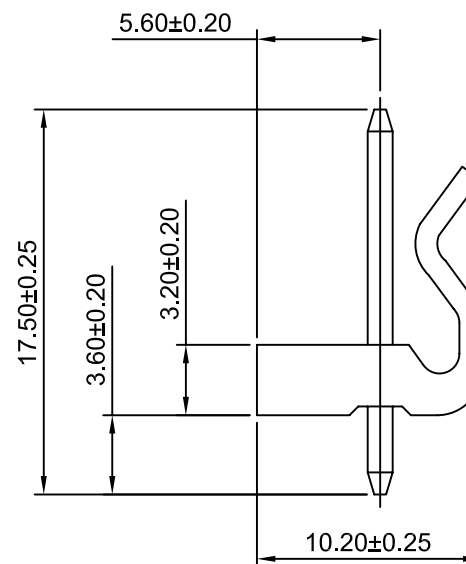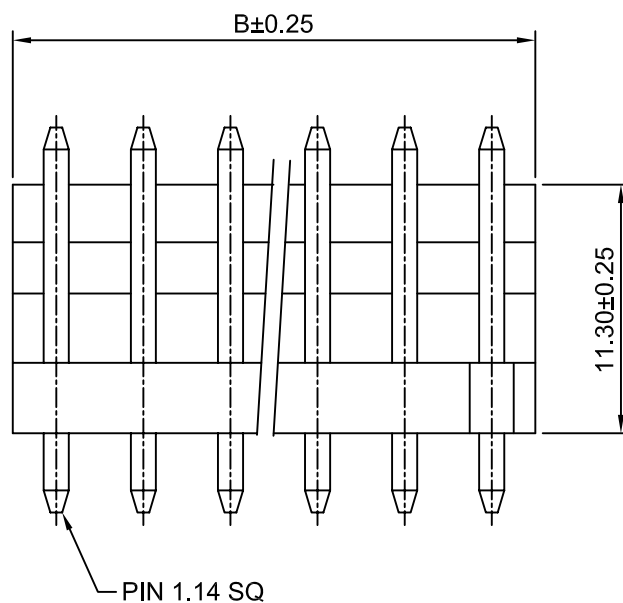

			Guangzhou cal-boz technology Co., Limited.	
			广州市卡而博泽科技有限公司	
Unit	Scale	Sheet	Title :	
mm	3:1	1 of 1		
Draw BY:		Approved :		3.96mm PITCH 180° WAFER
Tony Su		Jack Yin		
General Tolerance				
x.x≤0.25		ANGLE± 		
x.xx≤0.20				
x.xxx≤0.15		DRAW NO : C-A3961WV-XP		REV A0