

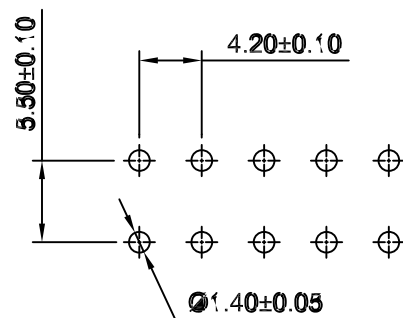


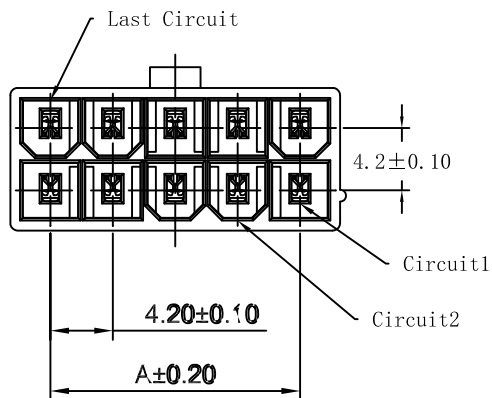

P.C.B LAYOUT





SPECIFICATIONS:

Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL 94V-2 (Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.40	2x7P	25.20	30.60
2x2P	4.20	9.60	2x8P	29.40	34.80
2x3P	8.40	13.80	2x9P	33.60	39.00
2x4P	12.60	18.00	2x10P	37.80	43.20
2x5P	16.80	22.20	2x11P	42.00	47.40
2x6P	21.00	26.40	2x12P	46.20	51.60

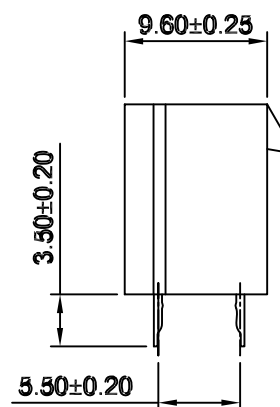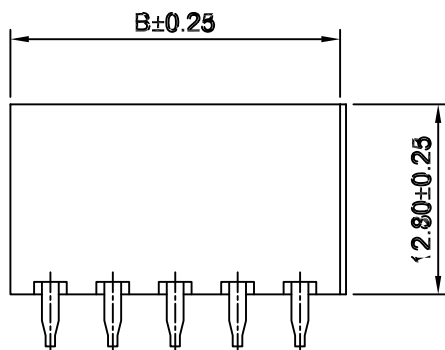

Guangzhou cal-boz Technology, Limited.
广州市卡而博泽科技有限公司

General Tolerance		PART NO.	C-C4201WVA-2xXP		
X.XX≤0.30 X.XX≤0.20 X.XXX≤0.10	ANGLE±	TITLE	4.20mm PITCH 180° DUALROW WAFER		
		DRAW	Niko		
		CHECK			

SCALE	UNIT	VERSION	DATE	SHEET	SIZE
1:1	mm	A0	04.05.2014	1/1	A4