

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

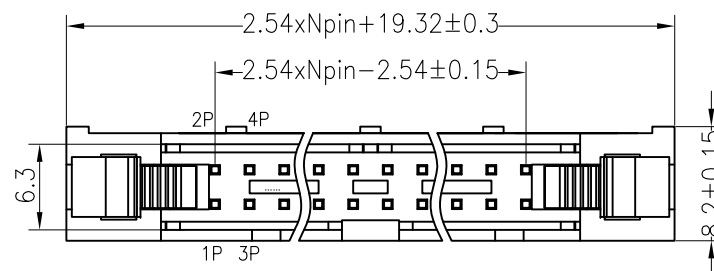
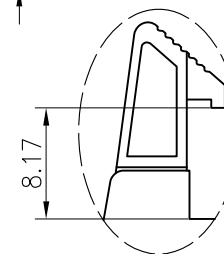
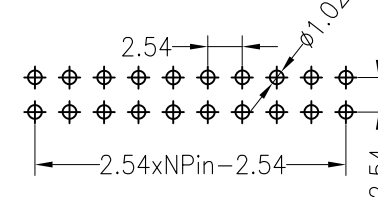
Operation Temperature:-40°C to +105°C

Contact Material:Brass


Contact Plating: Au or Sn Over Ni

Insulator Material: Polyester(UL94V-0)

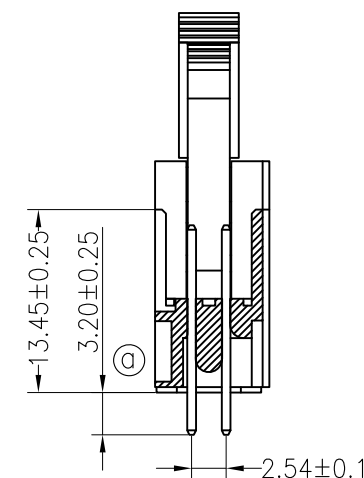
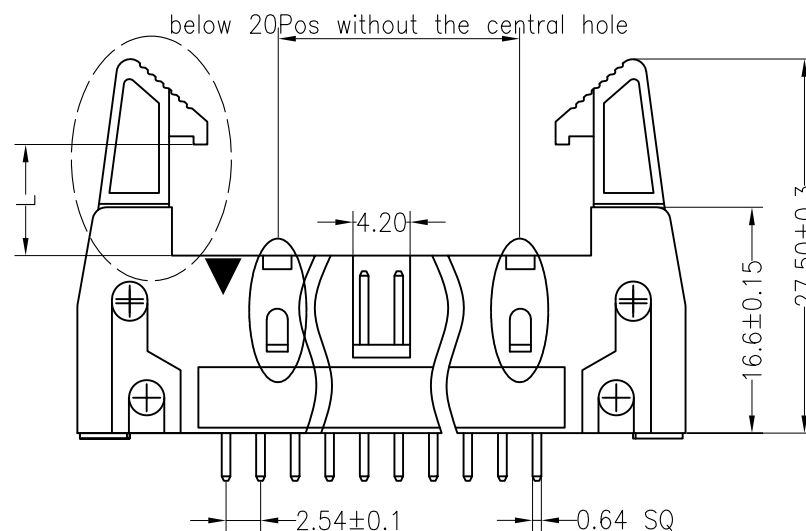
Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Long Latch



Short Latch

Guangzhou cal-boz Technology, Limited.
广州市卡而博泽科技有限公司

General Tolerance

PART NO. C-DC2-2xXP-6T

X.XX ≤ 0.30
X.XX ≤ 0.20
X.XXX ≤ 0.10 ANGLE $\pm$

TITLE

2.54 Ejector header Npin 180°

DRAW

Niko

CHECK

SCALE

UNIT

REV

DATE

SHEET

SIZE

1:1

mm

A1

13.05.2014

1/1

A4

[Http://www.cal-boz.com](http://www.cal-boz.com)