
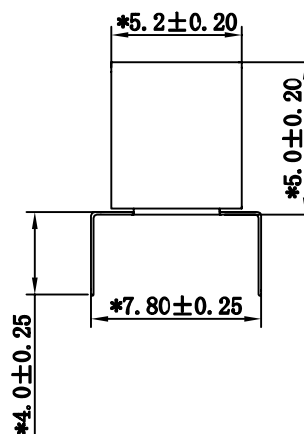
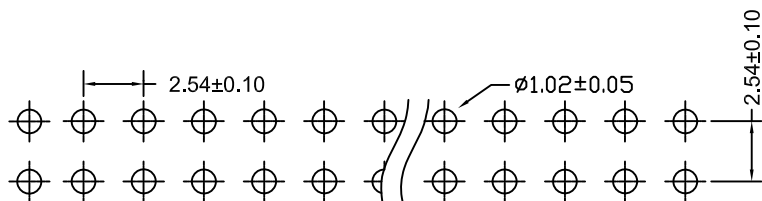
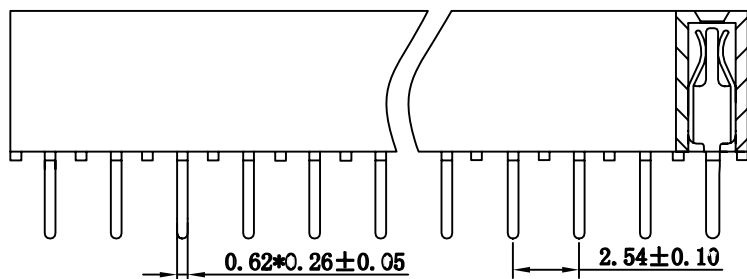


RoHS

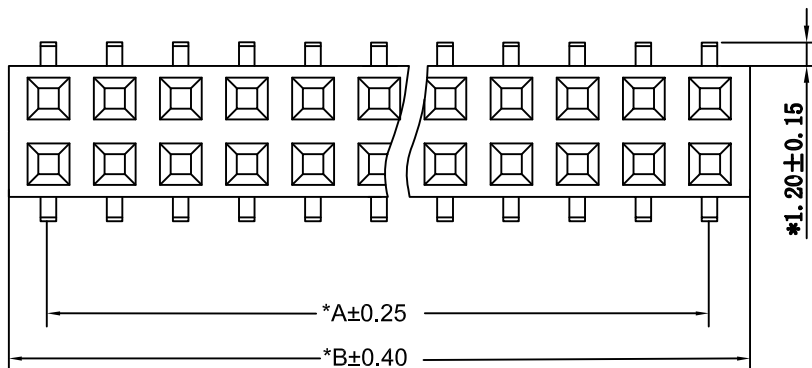

注：*标识表示重点尺寸

MATERIAL

Insulator :PBT+30%G.F(UL94V-0)

Contact :Phosphor Brass

Contact Plating:Gold over 50u" Nickel

Color : Black

Plating: 1.0u" Au

SPECIFICATION

Current Rate : 3Amp

Operation Temperature:-40 C° to +105 C°

Contact Resistance: 20mΩ MAX.at DC 1A

Insulation Resistance: 1000MΩ MIN.at DC 500V

Dielectirc Strength:AC 500V Per minute

PIN Number	Dimension(mm)		PIN Number	Dimension(mm)	
	A	B		A	B
.....			2*21P	50.80	53.84
2*2P	2.54	5.58	2*22P	53.34	56.38
2*3P	5.08	8.12	2*23P	55.88	58.92
2*4P	7.62	10.66	2*24P	58.42	61.46
2*5P	10.16	13.20	2*25P	60.96	64.00
2*6P	12.70	15.74	2*26P	63.50	66.54
2*7P	15.24	18.28	2*27P	66.04	69.08
2*8P	17.78	20.86	2*28P	68.58	71.62
2*9P	20.32	23.36	2*29P	71.12	74.16
2*10P	22.86	25.90	2*30P	73.66	76.70
2*11P	25.40	28.44	2*31P	76.20	79.24
2*12P	27.94	30.98	2*32P	78.74	81.78
2*13P	30.48	33.52	2*33P	81.28	84.32
2*14P	33.02	36.06	2*34P	83.82	86.86
2*15P	35.56	38.60	2*35P	86.36	89.40
2*16P	38.10	41.14	2*36P	88.90	91.94
2*17P	40.64	43.68	2*37P	91.44	94.48
2*18P	43.18	46.22	2*38P	93.98	97.02
2*19P	45.72	48.76	2*39P	96.52	99.56
2*20P	48.26	51.30	2*40P	99.06	102.10



Guangzhou cal-boz Technology, Limited.

广州市卡而博泽科技有限公司

General Tolerance

PART NO. C-FH2XP-B-CA

X.XX≤0.30
X.XX≤0.20
X.XXX≤0.10

ANGLE±



TITLE

DRAW Niko

CHECK

SCALE

UNIT

REV

DATE

SHEET

SIZE

1:1

mm

A0

18.10.2009

1/1

A4

Http\\www.cal-boz.com