


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

- 参数:
- 1. 额定电流/Current Rating:3.0Amp
 - 2. 接触电阻/Contact Resistance:20mΩ Max
 - 3. 耐电压/Dielectric Withstanding Voltage 1000V AC/DC
 - 4. 绝缘电阻/Insulation resistance: 1000MΩ Min
 - 5. 工作温度/Operation Temperature:-40℃~+105℃

- 材质:
- 1. 针材料/Contact Material:Brass
 - 2. 触点材料/Contact Plating: Au Or Sn Over Ni
 - 3. 绝缘材料/Insulator Material:Polyester (UL94V-0)
 - 4. 材质/standard: PBT
 - 5. 耐温/MAX.Processing Temp: 180℃ for 30-60 seconds
200℃ for 10 seconds

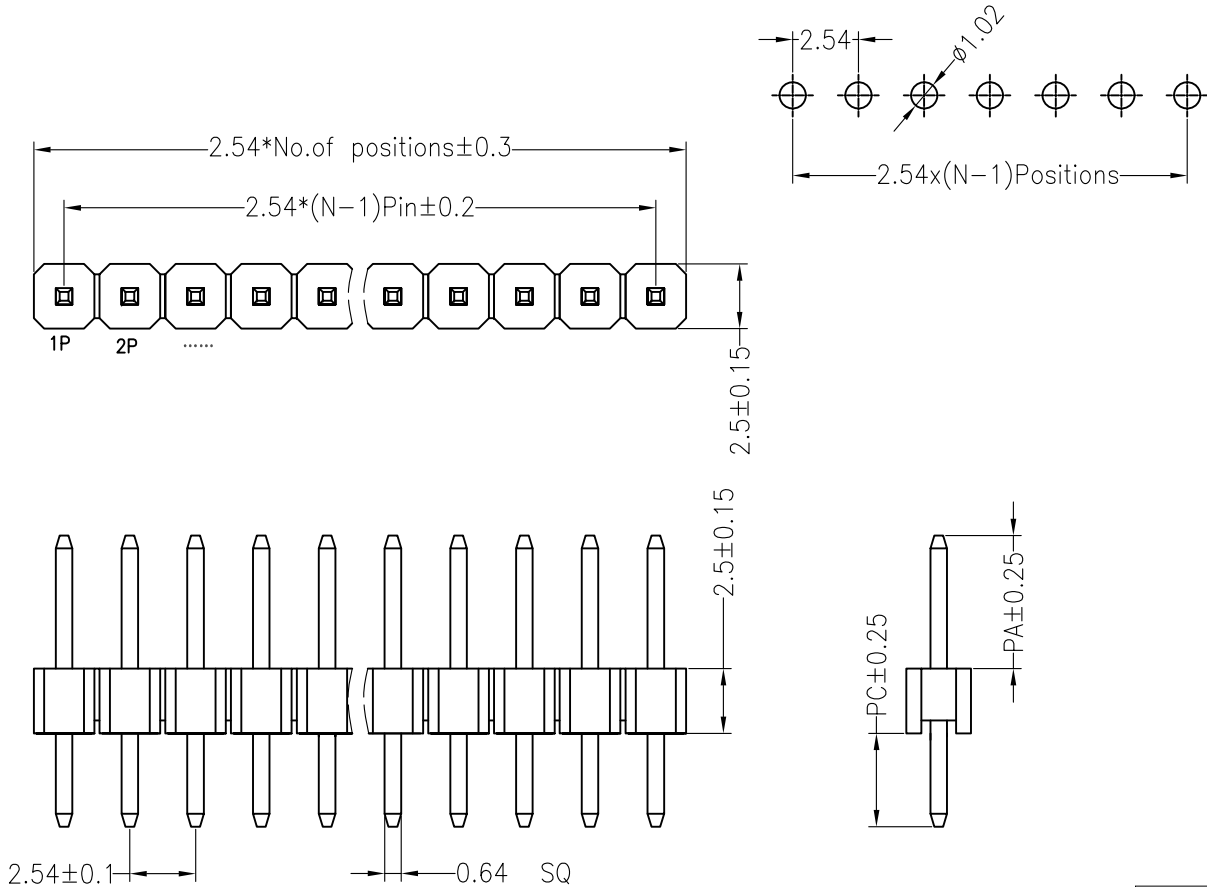


Dimension antitheses list			
ITEM	PA	PC	L
Standard	6.00	3.00	11.50
Alternate			



Guangzhou cal-boz Technology.,Limited.

广州市卡而博泽科技有限公司

General Tolerance		PART NO. C-XP-B-VA				
X.XX≤0.30 X.XX≤0.20 X.XXX≤0.10	ANGLE±	TITLE	2.54mm Pin Header 2.5mm Single 180°			
		DRAW	Niko			
		CHECK				
SCALE	UNIT	VERSION	DATE	SHEET	SIZE	
1:1	mm	A0	28.03.2012	1/1	A4	

Http\\www.cal-boz.com