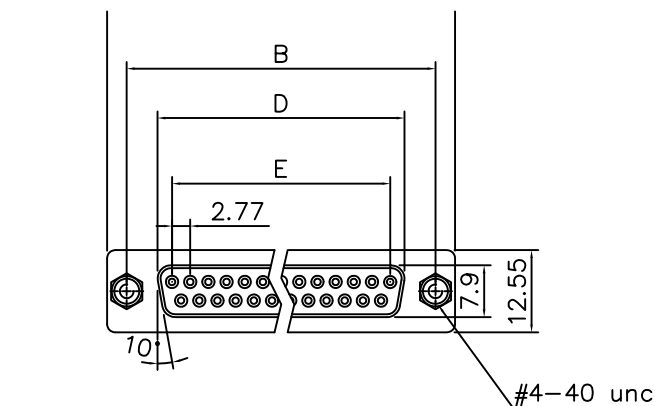


#4-40 unc screwlock installed

Product Specification

Material

Insulator : See ordering info for colour type
Contact : Copper alloy
Shell : Steel, 100u" Tin Over 50u" min Copper
Clinch Nut: Brass, 100u" min Nickel Plated.
Screwlock : Brass, 100u" min Nickel Plated.

Electrical




Contact Resistance :20 milliohms
Max at 1 AMP DC.

Insulation Resistance :1000
megohms at 500 VDC




Dielectric Withstanding Voltage :
1000 VAC/rms 60Hz for 1 minute

Current Rating :3 AMP

Volatge Rating :250 VAC/rms 60Hz

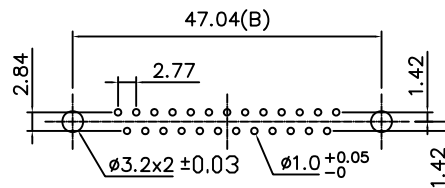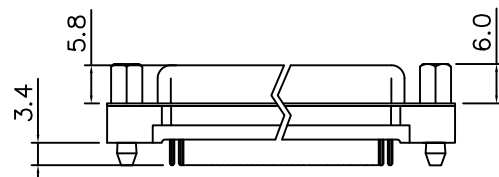

Recomended PCB Layout

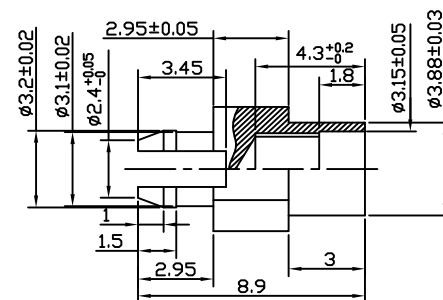

Dimensions

Positions	A	B	D	E
9	30.81	24.99	16.33	11.08
15	39.20	33.30	24.70	19.39
25	53.05	47.04	38.40	33.24
37	69.40	63.50	54.80	49.86



Guangzhou cal-boz Technology, Limited.

广州市卡而博泽科技有限公司

General Tolerance

PART NO. SD9SF-VA

X.XX≤0.30
X.XX≤0.20
X.XXX≤0.10

ANGLE±



TITLE

192 SERIES D-SUB STRAIGHT TYPE W/O WETAL REAR SHELL

DRAW

CHECK

SCALE

UNIT

VERSION

DATE

SHEET

SIZE

4:1

mm

V1.0

18.12.2018

1/1

A4

[Http\\www.cal-boz.com](http://www.cal-boz.com)